

Rated Voltage : 12V

Operating Temp : 10~70°C

Protection : Auto-Restart /Impedance



Material : Housing Plastic (UL : 94V-0)
 Impeller Plastic (UL : 94V-0)

Weight : 56.30g

Safety Approval



AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)

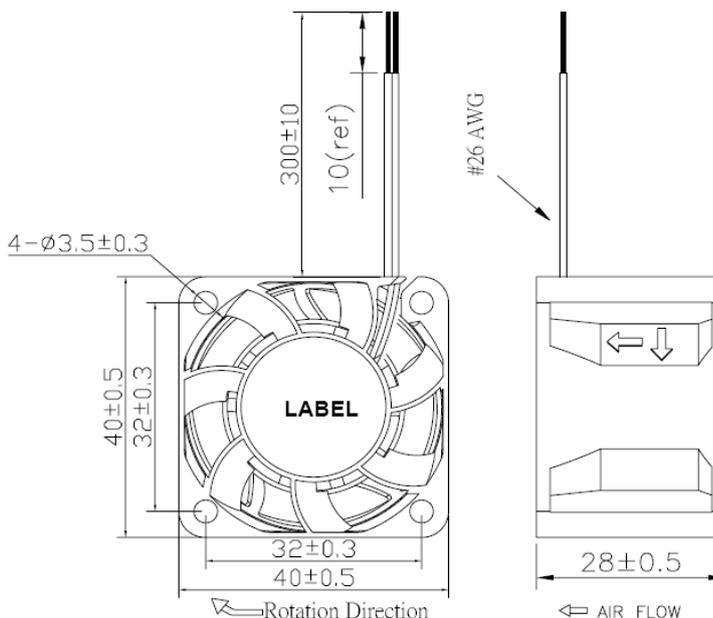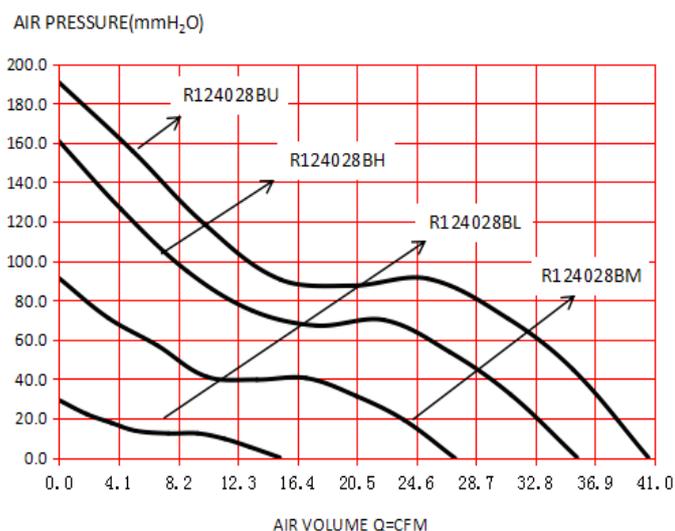

Series	Bearing (*)	Rated Voltage (V)	Rated Current (Amp)	Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Noise dB(A)
						(CFM)	m ³ /min		
R124028XL	●	12	0.21	2.52	13000	15.19	0.43	29.17	45.5
R124028XM	●	12	0.86	10.32	23000	27.27	0.77	91.10	61.1
R124028XH	●	12	1.86	22.32	30000	35.66	1.01	160.65	67.5
R124028XU	●	12	2.60	31.20	34000	40.57	1.15	190.51	70.0

*Bearing Type : ○ Sleeve ▲ EBR ● 2 Ball

*Noise measured at the distance of one meter from the axis of intake.

*The latest version would be as per the standard issued by REGO only.