

Rated Voltage : 12V

Operating Temp : 10~70°C

Protection : Auto-Restart



Material : Housing Plastic (UL : 94V-0)
 Impeller Plastic (UL : 94V-0)

Weight : 97g

Safety Approval



AIR FLOW-AIR PRESSURE(PERFORMANCE CURVES)

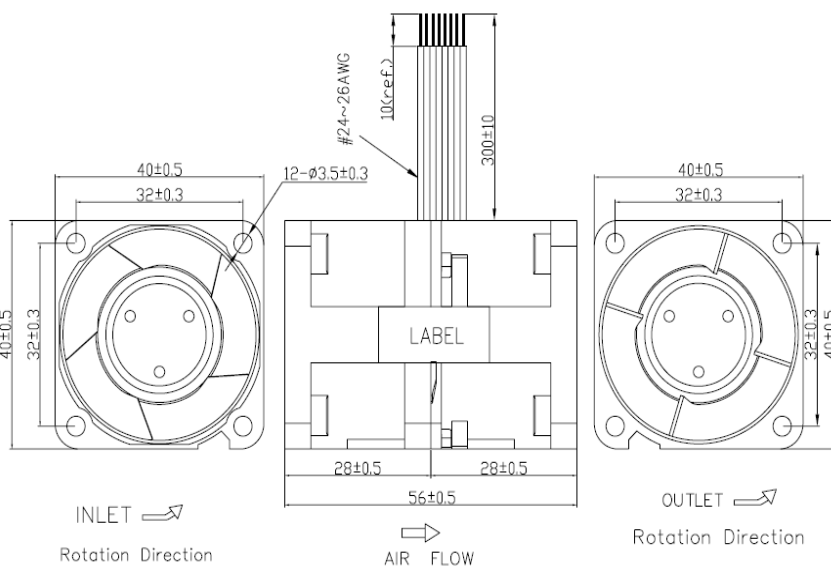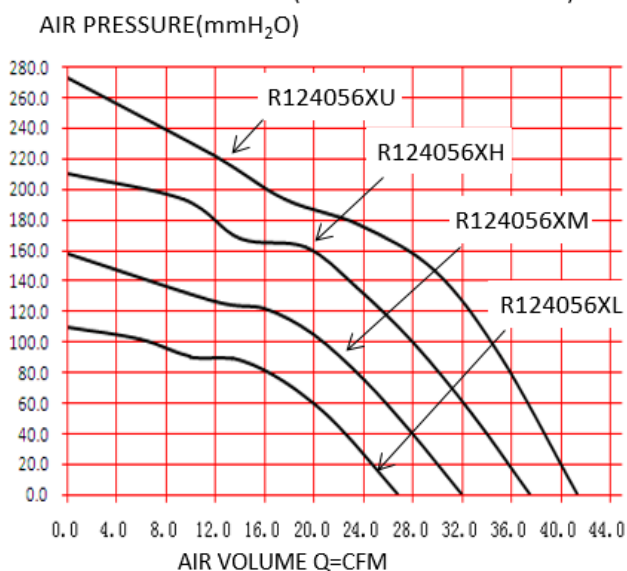

Series	Bearing (*)	Rated Voltage (V)	Rated Current (Amp)	Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Noise dB(A)
						(CFM)	m ³ /min		
R124056XL	●	12	1.05 (TTL)	12.6	22000 (IN) 20000 (OUT)	26.79	0.76	109.97	68
			0.64 (IN) 0.41 (OUT)						
R124056XM	●	12	1.65 (TTL)	19.8	26000 (IN) 24000 (OUT)	32.16	0.91	157.8	72
			0.98 (IN) 0.65 (OUT)						
R124056XH	●	12	2.4 (TTL)	28.8	30000 (IN) 28000 (OUT)	37.54	1.06	210.44	77.3
			1.45 (IN) 0.92 (OUT)						
R124056XU	●	12	3.9 (TTL)	46.8	34000 (IN) 32000 (OUT)	41.42	1.17	273.03	81
			2.55 (IN) 1.3 (OUT)						

*Bearing Type : ○ Sleeve ▲EBR ●2 Ball

*Noise measured at the distance of one meter from the axis of intake.

*The latest version would be as per the standard issued by REGO only.