

Rated Voltage : 12V

Safety Approval

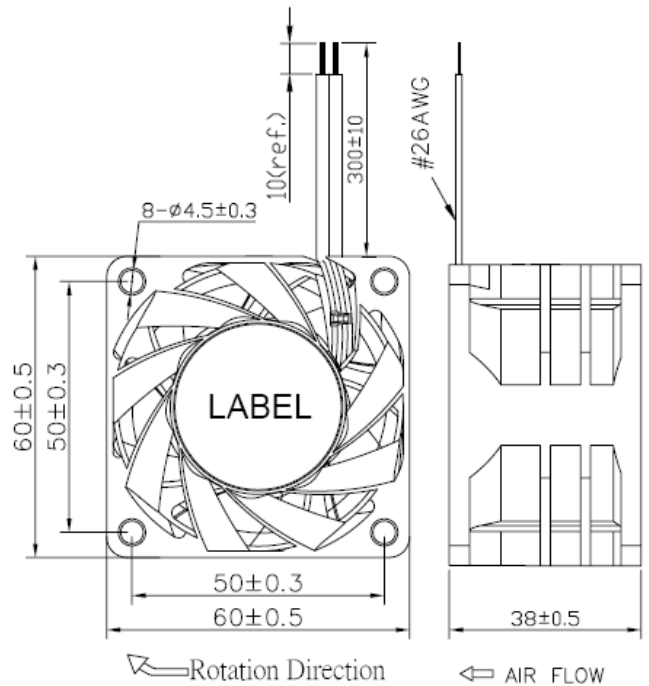
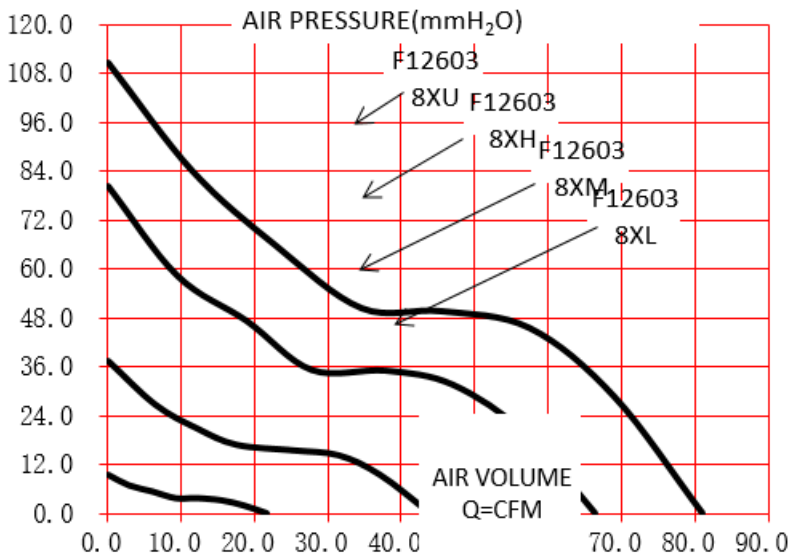
Operating Temp : 10~70°C



Protection : Auto-Restart /Impedance

 Material : Housing Plastic (UL : 94V-0)  
 Impeller Plastic (UL : 94V-0)


Weight : 125g

 AIR FLOW-AIR  
 PRESSURE(PERFORMANCE CURVES)


Series	Bearing (*)	Rated Voltage (V)	Rated Current (Amp)	Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH2O)	Noise dB(A)
						(CFM)	m3/min		
F126038XL	●	12	0.12	1.44	5000	21.64	0.61	9.42	34.5
F126038XM	●	12	0.55	6.60	10000	44.01	1.25	37.38	53
F126038XH	●	12	1.75	21	15000	66.42	1.88	80.57	63.5
F126038XU	●	12	3	36	18500	81.08	2.30	110.86	68

\*Bearing Type : ○ Sleeve ▲EBR ●2 Ball

\*Noise measured at the distance of one meter from the axis of intake.

\*The latest version would be as per the standard issued by REGO only.