

Rated Voltage : 12V

Operating Temp : 10~70°C

Protection : Auto-Restart /Impedance



Material : Housing Plastic (UL : 94V-0)  
 Impeller Plastic (UL : 94V-0)

Weight : 32g

Safety Approval



AIR PRESURE-AIR FLOW (PERFORMANCE CURVES)  
 AIR PRESURE(mmH<sub>2</sub>O)

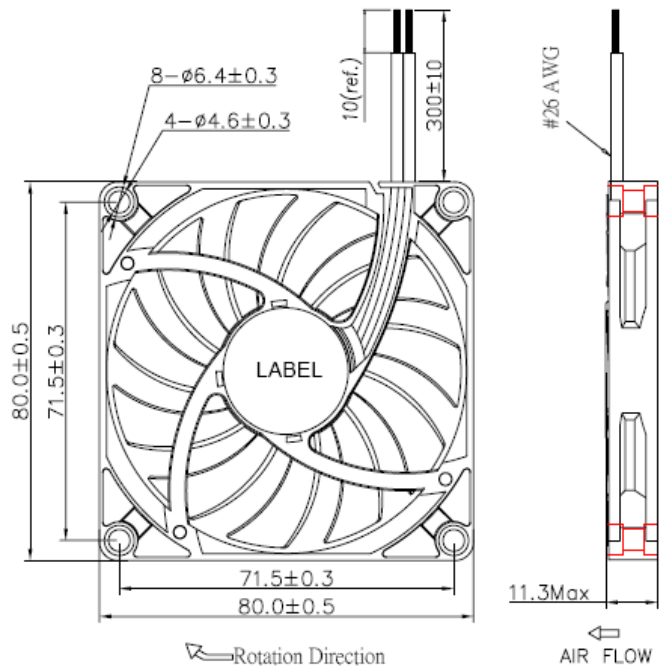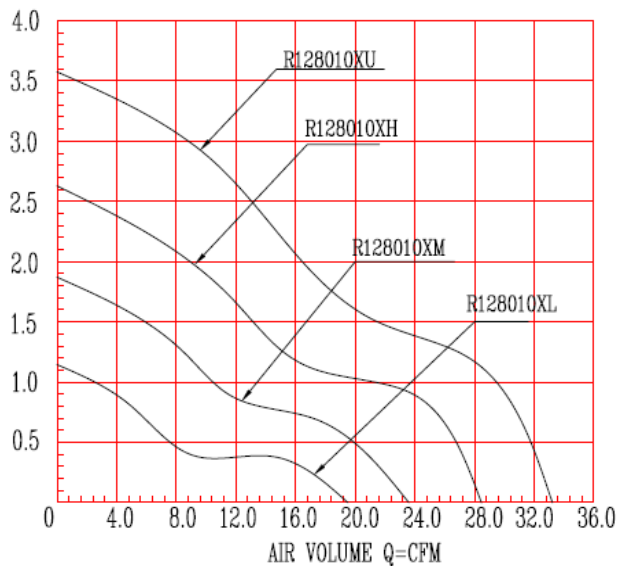

Series	Bearing (*)	Rated Voltage (V)	Rated Current (Amp)	Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH <sub>2</sub> O)	Noise dB(A)
						(CFM)	m <sup>3</sup> /min		
R128010XL	▲●	12	0.15	1.8	2400	19.12	0.54	1.17	24
R128010XM	▲●	12	0.20	2.40	3000	23.90	0.68	1.83	27.7
R128010XH	▲●	12	0.25	3.00	3600	28.68	0.81	2.63	31.8
R128010XU	▲●	12	0.35	4.20	4200	33.46	0.95	3.58	36.5

\*Bearing Type : ○ Sleeve ▲EBR ●2 Ball

\*Noise measured at the distance of one meter from the axis of intake.

\*The latest version would be as per the standard issued by REGO only.