

Rated Voltage : 12V

Operating Temp : 10~70°C

Protection : Auto-Restart /Impedance



 Material : Housing Plastic (UL : 94V-0)
 Impeller Plastic (UL : 94V-0)

Weight : 42g

Safety Approval



AIR FLOW-AIR PRESSURE (PERFORMANCE CURVES)

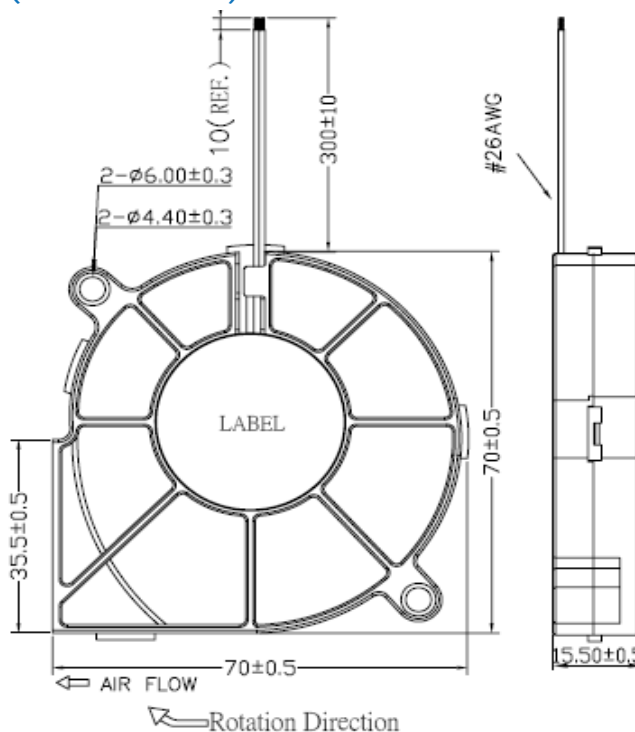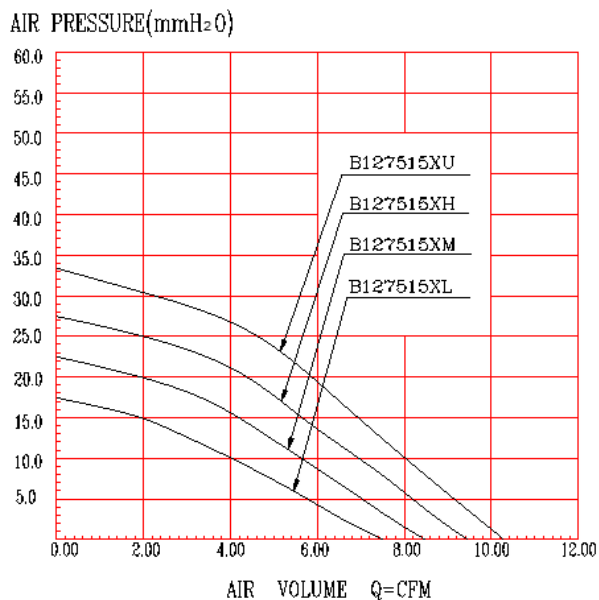

Series	Bearing (*)	Rated Voltage (V)	Rated Current (Amp)	Input Power (W)	Rated Speed (rpm)	Air Flow		Static Pressure (mmH ₂ O)	Noise dB(A)
						(CFM)	m ³ /min		
B127015XL	●	12	0.35	4.20	3600	6.91	0.20	13.78	43.0
B127015XM	●	12	0.45	5.40	4200	8.07	0.23	18.75	45.2
B127015XH	●	12	0.60	7.20	4800	9.22	0.26	24.49	48.6
B127015XU	●	12	0.80	9.60	5400	10.37	0.29	31.00	52.30

*Bearing Type : ○ Sleeve ▲EBR ●2 Ball

*Noise measured at the distance of one meter from the axis of intake.

*The latest version would be as per the standard issued by REGO only.